	DOCUMENTATION		Form Approved OMB No. 0704-0188	
Public reporting burden for this collection gathering and maintaining the data needs	of information is estimated to average 1 hour per d, and completing and reviewing the collection of tions for reducing this burden to Washington Hea	response, including the time for reviewing	ng instructions, searching existing data sources,	
collection of information, Including sugges	finns for reducing this burnt - a second	securitation: Seuti contanients tedatolist	this builden estimate or any other aspect of this	
1. AGENCY USE ONLY (Leave blan		agoct of the property of the concept of the c	(0/04-0100), Washington, DC 20503.	
·	August 16, 1999	Technical Repo	3. REPORT TYPE AND DATES COVERED Technical Report # 47	
. TITLE AND SUBTITLE			5. FUNDING NUMBERS	
Thiophene-Linked Polyp	henvauinoxaline: A New Ele	actron Transport	· ·	
Thiophene-Linked Polyphenyquinoxaline: A New Electron Transport Conjugated Polymer for Electroluminescent Devices.			N00014-94-1-0540	
5. AUTHOR(S)	DOVICES.		Kenneth J. Wynne	
Y. Cui, X. Zhang and S. A	A. Jenekhe		R & T Code 3132111	
. PERFORMING ORGANIZATION N	AMES(S) AND ADDRESS(ES)		8. PERFORMING ORGANIZATION	
University of Rochester			REPORT NUMBER	
Department of Chemical)	Engineering		# 47	
206 Gavett hall, Box 270	166			
Rochester, NY 14627-01	66			
SPONSORING / MONITORING AG	ENCY HAVEOUR AND TOTAL			
	ENCY NAMES(S) AND ADDRESS(ES)	ļ	10. SPONSORING / MONITORING AGENCY REPORT NUMBER	
Office of Naval Research		Ī		
800 North Quincy Street		J		
Arlington, VA 22217-500	00			
. SUPPLEMENTARY NOTES			4000000	
Published in MACROMO	LECULES, 1999 , <i>32</i> , 3824-3	3826	19990823	
			17770063	
· ·				
DISTRIBUTION / AVAILABILITY ST			12. DISTRIBUTION CODE	
Reproduction in whole or	in part is permitted for any pu	Irnose of the United	12. DISTRIBUTION CODE	
Reproduction in whole or in States Government. This of	in part is permitted for any pu locument has been approved	Irnose of the United	12. DISTRIBUTION CODE	
Reproduction in whole or in States Government. This of	in part is permitted for any pu locument has been approved	Irnose of the United	12. DISTRIBUTION CODE	
Reproduction in whole or in states Government. This cand sale; its distribution is	in part is permitted for any pu document has been approved unlimited.	Irnose of the United	12. DISTRIBUTION CODE	
Reproduction in whole or in the states Government. This can sale; its distribution is	in part is permitted for any pu document has been approved unlimited.	Irnose of the United	12. DISTRIBUTION CODE	
Reproduction in whole or in the states Government. This can sale; its distribution is	in part is permitted for any pu document has been approved unlimited.	Irnose of the United	12. DISTRIBUTION CODE	
Reproduction in whole or states Government. This cand sale; its distribution is ABSTRACT (Maximum 200 words) A new n-type of	in part is permitted for any pudocument has been approved unlimited.	for public release		
Reproduction in whole or instates Government. This cand sale; its distribution is ABSTRACT (Maximum 200 words A new n-type of PTQx), was synthesized.	in part is permitted for any pudocument has been approved unlimited. conjugated polymer, poly[2]	purpose of the United for public release)-6,6'-bis(3-phenylquinoxaline)]	
Reproduction in whole or intates Government. This cand sale; its distribution is ABSTRACT (Maximum 200 words A new n-type of PTQx), was synthesized, lectroluminescent devices	in part is permitted for any pudocument has been approved unlimited. conjugated polymer, poly[2], characterized, and shown are PTOx thin films had a reference of the part of	2,2'-(thiophene-2,5-diyl)-6,6'-bis(3-phenylquinoxaline) electron transport polymer for	
Reproduction in whole or instates Government. This cand sale; its distribution is A new n-type of PTQx), was synthesized, dectroluminescent devices a synthesized, and a confirming its residue.	conjugated polymer, poly[2, characterized, and shown	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic)-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible	
Reproduction in whole or interest of the states Government. This countries are its distribution is A new n-type of PTQx), was synthesized electroluminescent devices a state of the stimated from cyclic voltage.	conjugated polymer, poly[2, characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 and metry to be 3.0 and 5.54 and metry to be 3.0 and 5.54 and 5.5	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic nity and ionization pot)-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were	
Reproduction in whole or instates Government. This count sale; its distribution is A new n-type of PTQx), was synthesized electroluminescent devices a xidation, confirming its restimated from cyclic voltaght emitting diodes using	conjugated polymer, poly[2, characterized, and shown property that is provided to the property to be 3.0 and 5.54 every provided to the property to be 3.0 and 5.54 every provided to the property to be 3.0 and 5.54 every provided to the pr	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic nity and ionization pot V, respectively. Poly(p)-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based	
Reproduction in whole or interest of the states Government. This countries are the states are th	conjugated polymer, poly[2, characterized, and shown property that is property to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic mity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P))-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of PTQx), was synthesized ectroluminescent devices aidation, confirming its retimated from cyclic voltaget (3.6 eV) and high in electron transport mate	conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent described documents.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic mity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P))-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of ectroluminescent devices addition, confirming its retimated from cyclic voltaget (3.6 eV) and high in electron transport mate	conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent described documents.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic mity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P))-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of ectroluminescent devices addition, confirming its retimated from cyclic voltaget (3.6 eV) and high in electron transport mate	conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent described documents.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic mity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P))-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of ectroluminescent devices addition, confirming its retimated from cyclic voltaget (3.6 eV) and high in electron transport mate	conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent described documents.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic mity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P))-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of ectroluminescent devices addition, confirming its retimated from cyclic voltaget (3.6 eV) and high in electron transport mate	conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent described documents.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic mity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P))-6,6'-bis(3-phenylquinoxaline) electron transport polymer for al reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of the condition of the con	conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent described documents.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic mity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P))-6,6'-bis(3-phenylquinoxaline)] electron transport polymer for eal reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of PTQx), was synthesized ectroluminescent devices xidation, confirming its retimated from cyclic voltaget emitting diodes using blage (3.6 eV) and high in electron transport mate reviously reported n-type of SUBJECT TERMS	conjugated polymer, poly[2] conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent depolymers.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic nity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P good efficiency (0.4%) evices was found to be)-6,6'-bis(3-phenylquinoxaline)] electron transport polymer for eal reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on	
A new n-type of the control of the c	conjugated polymer, poly[2], characterized, and shown and the polymer to be 3.0 and 5.54 eV and an	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic nity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P good efficiency (0.4%) evices was found to be)-6,6'-bis(3-phenylquinoxaline)] electron transport polymer for cal reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on the performance of PTQx as be far superior compared to all	
A new n-type of PTQx), was synthesized dectroluminescent devices xidation, confirming its restimated from cyclic voltaght emitting diodes using oltage (3.6 eV) and high in electron transport matereviously reported n-type of SUBJECT TERMS	conjugated polymer, poly[2] conjugated polymer, poly[2], characterized, and shown in PTQx thin films had a real-type nature. Electron affirmmetry to be 3.0 and 5.54 eV g PTQx as an electron transprightness (710 cd/m²) with rial in electroluminescent depolymers.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic nity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P good efficiency (0.4%) evices was found to be)-6,6'-bis(3-phenylquinoxaline)] electron transport polymer for cal reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on the performance of PTQx as be far superior compared to all	
A new n-type of PTQx), was synthesized dectroluminescent devices addition, confirming its restimated from cyclic voltagent (3.6 eV) and high in electron transport mater reviously reported n-type of SUBJECT TERMS olyquinoxaline; electron transport polyquinoxaline; electron transport polyquinoxaline; electron transport mater reviously reported n-type of subject terms.	in part is permitted for any purious document has been approved unlimited. conjugated polymer, poly[2], characterized, and shown and the polymer at the polymer and the polymer and the polymers. PTQx thin films had a result of the polymers and electron transport polymers and polymers.	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic inty and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P good efficiency (0.4%) evices was found to be inescence; n-type)-6,6'-bis(3-phenylquinoxaline)] electron transport polymer for cal reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on the performance of PTQx as the far superior compared to all 15. NUMBER OF PAGES 23 16. PRICE CODE	
A new n-type of PTQx), was synthesized dectroluminescent devices xidation, confirming its restimated from cyclic voltaght emitting diodes using oltage (3.6 eV) and high in electron transport matereviously reported n-type of SUBJECT TERMS	conjugated polymer, poly[2], characterized, and shown and the polymer to be 3.0 and 5.54 eV and an	2,2'-(thiophene-2,5-diyl to be an excellent eversible electrochemic nity and ionization pot V, respectively. Poly(p port layer, ITO/PPV/P good efficiency (0.4%) evices was found to be)-6,6'-bis(3-phenylquinoxaline)] electron transport polymer for cal reduction but an irreversible ential of PTQx thin films were henylene vinylene) (PPV) based TQx/Al, combined low turn-on . The performance of PTQx as be far superior compared to all 15. NUMBER OF PAGES 23 16. PRICE CODE	

OFFICE OF NAVAL RESEARCH

GRANT NO: N00014-94-1-0540

R&T Code 3132111 Kenneth J. Wynne

Technical Report NO. 47

Thiophene-Linked Polyphenylquinoxaline: A New Electron Transport Conjugated Polymer for Electroluminescent Devices

By

Y. Cui, X. Zhang and S. A. Jenekhe Published

In

MACROMOLECULES

Departments of Chemical Engineering and Chemistry University of Rochester, New York 14627

August 16, 1999

Reproduction in whole or in part is permitted for any purpose of the United States Government

This document has been approved for public release and sale; its distribution is unlimited.

Thiophene-Linked Polyphenylquinoxaline: A New Electron Transport Conjugated Polymer for Electroluminescent Devices

Yuanting Cui, Xuejun Zhang, and Samson A. Jenekhe* Departments of Chemical Engineering and Chemistry University of Rochester, Rochester, New York 14627-0166

Abstract

A new n-type conjugated polymer, poly[2,2'-(thiophene-2,5-diyl)-6,6'-bis(3-phenylquinoxaline)] (PTQx), was synthesized, characterized, and shown to be an excellent electron transport polymer for electroluminescent devices. PTQx thin films had a reversible electrochemical reduction but an irreversible oxidation, confirming its n-type nature. Electron affinity and ionization potential of PTQx thin films were estimated from cyclic voltammetry to be 3.0 and 5.54 eV, respectively. Poly(phenylene vinylene) (PPV) based light emitting diodes using PTQx as an electron transport layer, ITO/PPV/PTQx/Al, combined low turn-on voltage (3.6 V) and high brightness (710 cd/m²) with good efficiency (0.4%). The performance of PTQx as an electron transport material in electroluminescent devices was found to be far superior compared to all previously reported n-type polymers.

Thiophene-Linked Polyphenylquinoxaline: A New Electron Transport Conjugated Polymer for Electroluminescent Devices

Yuanting Cui, Xuejun Zhang, and Samson A. Jenekhe* Departments of Chemical Engineering and Chemistry University of Rochester, Rochester, New York 14627-0166

Electroluminescent semiconducting polymer devices are promising for display applications. Because most current electroluminescent (EL) conjugated polymers inject and transport holes more efficiently than electrons, 1,2 synthesis of new and better electron transport (ET) polymers is needed to further improve device performance. n-Type conjugated polymers such as the polyquinolines, polyquinoxalines, polypyridine, and polybenzobisazoles have recently been demonstrated as ET layers in light-emitting diodes (LEDs). In this paper we report the synthesis of a new n-type, thiophene-linked, conjugated polyphenylquinoxaline (1b) and show that it is an excellent ET material for polymer LEDs. EL devices of the type ITO/poly(phenylene vinylene)/1b/Al were found to combine low turn-on voltage (3.6 V) and high brightness (710 cd/m² at 12 V) with good efficiency (0.4% photons/electron) under ambient air fabrication and operation. The preliminary results suggest that the new conjugated polyphenylquinoxaline is far superior as an electron transport material for EL devices compared to previously reported ET materials. 1-6

We have previously shown that conjugated polyquinolines with diverse chain structures were good electron transport (n-type) materials whose highest occupied molecular orbital (HOMO) and lowest unoccupied molecular orbital (LUMO) levels can be significantly varied. The increased electron deficiency of the quinoxaline ring due to an additional imine nitrogen, compared to the quinoline ring, suggested that the LUMO levels of conjugated polyquinoxalines could be lower and perhaps improve electron transport properties. The well known p-phenylene-linked polyphenylquinoxaline (1a, PPQx)⁸ has already been reported to be an ET material for LEDs.⁴ We synthesized and investigated the thiophene-linked derivative 1b, poly[2,2'-

(thiophene-2,5-diyl)-6,6'-bis(3-phenylquinoxaline)] (PTQx), in order to explore the feasible HOMO/LUMO level shifts due to its acceptor-donor-acceptor structure and their consequences for polymer/polymer heterojunction LED performance.

Monomer Synthesis. 2,5-Bis(phenylethynyl)thiophene (2) was synthesized according to literature method.⁹ Recrystallization from methanol afforded a yellow-brown product (90%), mp 84-86°C (lit. 85 °C); ¹H NMR (300 MHz, CDCl₃, TMS)δ: 7.18 (s, 2H), 7.41 (m, 6H), 7.58 (m,4H). 2,5-Bis(phenyloxoacetyl)thiophene (3): To a solution of 2 (2.84g, 10 mmol) in 50 ml dichloromethane was added 200 mg Adogen 464 (Aldrich), 80 ml water, 1.6 g NaHCO₃, and 8 g KMnO₄. After vigorous stirring at room temperature for 24h, TLC indicated that the reaction was complete. Sodium bisulfite (14 g) and hydrochloric acid (6 ml) were slowly added to reduce excess oxidizing agents. After rotary evaporation of CH₂Cl₂, filtration, and recrystallization from ethanol, yellow needle-like crystals of 3 (65%) were obtained. Mp: 94-95°C; mass spec. (EI) 348 (calc. for C₂₀H₁₂SO₄), 348 (found); ¹H NMR (300 MHz, CDCl₃): δ 7.56 (m, 4H), 7.70 (m, 2H), 7.83 (s, 2H), 8.10 (m, 4H); FT-IR (KBr, cm⁻¹): 1660, 1590, 1450, 1200, 1176, 790, 683, 652.

Oligoquinoxaline Synthesis. 2,2'-Bis(3-phenylquinoxaline)thiophene-2,5-diyl (4, TQx): A solution of monomer 3 (694 mg, 2 mmol) and 1,2-phenylenediamine (216 mg, 4 mmol) in 20 ml chloroform was refluxed for 10 h. The crude product was recrystallized from ethanol to afford a yellow 4 (800mg, 85%). Mp:312-314°C; mass spec. (EI) 492 (calc. for C₃₂H₂₀N₄S), 492 (found); ¹H NMR (300 MHz, CDCl₃, δ): 6.53 (s, 2H), 7.55 (m, 6H), 7.68 (m, 4H), 7.83 (m, 4H), 8.20 (M, 4H); ¹H NMR (300 MHz, d-nitromethane/GaCl₃, δ): 7.82, 7.90, 8.42, 8.50, 8.60.

Polymer Synthesis: PTQx (1b). Equimolar amounts of monomer 3 (694 mg, 2mmol) and 3,3-diaminobenzidine (428mg, 2 mmol) were dissolved in 8 ml of freshly distilled m-cresol in a glass reactor fitted with a mechanical stirrer, two gas inlets, and a side arm. The reaction

mixture was stirred under argon purge at 100°C for 24 h during which progressive increase of the solution viscosity was observed. After cooling to room temperature the reaction mixture was poured into 100 ml methanol, precipitating a red polymer product which was collected by suction filtration and continuously extracted with ethanol for 24h. The product was vacuum dried at 80 °C (95% yield): $[\eta] = 1.09$ dL/g in methanesulfonic acid (MSA) at 30°C; ¹H NMR (300 MHz, d-nitromethane/GaCl₃, δ): 7.80, 7.92, 8.65, 8.86, 9.10; FT-IR (KBr, cm⁻¹): 3030, 1620, 1530, 1480, 1345, 1185, 1020, 800, 700, 600.

Results. The new tetraketone 3 was synthesized and used to prepare oligomer 4 and thiophene-linked conjugated poly(phenylquinoxaline) 1b (scheme 1). ¹H NMR spectra of the oligomer in both CDCl₃ and d-nitromethane/GaCl₃ and that of the polymer PTQx in the latter solvent allowed the ready assignment of the proton resonances to the polymer structure. The onset of thermal decomposition under nitrogen in thermogravimetric analysis (TGA) was 580°C. No phase transition was observed in differential scanning calorimetry (DSC) in repeated scans up to 300°C, suggesting that the glass transition of the polymer is high. ^{4,8} PTQx was completely soluble in formic acid (red), *m*-cresol (red), MSA (blue), and nitromethane/GaCl₃ but it was only partially soluble in chloroform or tetrahydrofuran. A sample of PPQx (1a) synthesized for comparison with PTQx had similar solubility characteristics except that it was also soluble in chloroform (yellow solution).

The intrinsic viscosity of PTQx (1.09 dL/g) was smaller than that of PPQx (1.43 dl/g) even though the thiophene-linked polymer had better film-forming properties. The reason for this difference is likely because the thiophene-linked polymer chain is more flexible compared to the 1,4-phenylene-linked PPQx. Early work on PPQx with an intrinsic viscosity of 2.62 dL/g also reported a \overline{M}_w value of 350,000.^{8a} Thus, the measured intrinsic viscosity of the present polymers reflects moderate molecular weights.

Oligoquinoxaline 4 solutions in CHCl₃ and formic acid had absorption maxima (λ_{max}) of 405 nm (log ϵ = 4.69) and 448 nm (log ϵ = 4.75), respectively. The corresponding emission maxima in the same solvents were 471 and 574nm, respectively. Surprisingly, the solution absorption and emission spectra of PTQx were only moderately red shifted from those of the oligomer. The absorption λ_{max} of PTQx in CHCl₃ and formic acid were 414 nm (log ϵ = 4.64) and 446 nm (log ϵ = 4.80), respectively. The emission maxima of PTQx in these two solvents were 522 and 603 nm, respectively. These spectral properties of PTQx and its oligomer 4 can be understood in terms of *intramolecular charge transfer* (ICT) between the electron accepting phenylquinoxalines and electron donating thiophene moiety within the polymer repeat unit.^{7, 10} The remarkable similarity of the absorption λ_{max} of oligoquinoxaline TQx and the conjugated polymer PTQx in formic acid arises from the dominant role of ICT when the quinoxaline rings are protonated and hence are stronger electron acceptor moieties.

The optical absorption and photoluminescence (PL) spectra of PTQx thin film are shown in Figure 1. The π - π * absorption maximum at 434 nm (2.86 eV) in the thin film is red shifted from that in chloroform solution (414 nm, 3.0 eV). A solid state optical band gap (E_g^{opt}) of 2.41 eV was obtained from the optical absorption edge (Fig. 1). The solid state PL emission spectrum (430-nm excitation) shown in Figure 1 has a peak at 536 nm with a vibronic shoulder at 580 nm. The very poor fluorescence efficiency (<10⁻²%) of PTQx thin film and the moderate Stokes shift (0.55 eV) suggests excimer emission¹¹ as its origin although ICT may also contribute to the rather low PL quantum yield.

Cyclic voltammetry of PTQx thin films revealed a reversible reduction and an irreversible oxidation waves. The formal potential $E^{0'}$ for the reduction was -1.60 V (versus SCE) and the onset reduction potential was -1.40 V. The oxidation had an onset potential of 1.14 V and a peak at 1.38 V. From these redox data we estimated an electrochemical band gap

($E_g^{el} = E_{onset}^{ox} - E_{onset}^{red}$) of 2.54 eV, an electron affinity (EA = $E_{onset}^{red} + 4.4$) of 3.0 eV and an ionization potential (IP = $E_{onset}^{ox} + 4.4$) of 5.54 eV. We note that these EA and IP estimates are based on using the SCE energy level of -4.4 eV below the vacuum level^{7a}; others⁴ have used SCE energy levels as low as -4.8 eV which would increase the EA value of PTQx to 3.4 eV. Even the conservative EA value of 3.0 eV is still quite large, which in conjunction with the reversible reduction suggests that PTQx is a good n-type conjugated polymer with potential for application as an electron injection and transport layer in EL devices.

We fabricated polymer/polymer heterojunction LEDs of the form ITO/PPV (35nm)/PTQx (40 nm)/Al to evaluate the potential of PTQx as an electron transport material for EL devices. The poly(p-phenylene vinylene) (PPV) thin film was spin coated onto ITO coated glass from a sulfonium precursor in methanol solution followed by standard procedures (thermal conversion at 250 °C for 1.5 h). PTQx thin film was spin coated from its formic acid solution (1 wt%) onto the PPV layer and dried at 80 °C in vacuum. EL spectrum from the PPV/PTQx heterojunction device at a bias voltage of 4V is also shown in Figure 1. The EL spectrum with vibronic peaks at 532 and 568nm is identical to the PL spectrum of PPV, EL spectrum of a single-layer ITO/PPV/Al device, and other reported PPV EL spectra. I

The current-voltage and luminance-voltage characteristics of the ITO/PPV(35 nm)/PTQx (40 nm)/Al LED are shown in Figure 2. The turn-on voltage of the device is 3.6V which is much less that the 7 V observed for the single-layer ITO/PPV/Al device. The substantially lowered turn-on and drive voltages of the PPV/PTQx diode (Fig. 2) show that the new thiophene-linked conjugated poly(phenylquinoxaline) is a good electron-injecting and electron-transport material for PPV-based EL devices. The maximum luminance of the PPV/PTQx diode is 710 cd/m², at a current density of 400 mA/cm² and a drive voltage of 12 V, which is about 40 times as bright as the single-layer PPV diode. The corresponding maximum EL efficiency was 0.4%

photons/electron which is significantly enhanced compared to 0.01% for the single-layer PPV diode. Although comparative PPV/PPQx bilayer LEDs had a similar 3.6 V turn-on voltage, the maximum luminance achieved under similar conditions was only 80 cd/m² which means that PTQx is far superior as an electron transport material compared to existing poly(phenylquinoxalines).^{4, 8} In fact, the present PPV/PTQx LEDs are also significantly improved compared to previously reported devices of PPV/polyphenylquinoxalines,⁴ PPV/polypyridine,⁵ and PPV/polyquinolines.³

Several factors may account for the observed good performance of PPV/PTQx diodes and particularly PTQx thin films as ET layers. The ready reversible electrochemical reduction of PTQx and its high electron affinity suggest efficient electron injection and transport to the PPV/PTQx interface. The HOMO/LUMO levels of PTQx (5.54/3.0 eV) relative to PPV (5.11/2.71 eV)^{7a} ensures that there are energy barriers to electrons and holes at the interface where injection of electrons could control recombination. Absence of evidence of exciplex formation ¹¹ or energy transfer at the heterojunction is also beneficial. Its high thermal stability, high intrinsic viscosity (molecular weight), and good amorphous film-forming properties are additional beneficial factors.

Summary. New thiophene-linked conjugated polyquinoxaline PTQx and oligoquinoxaline TQx have been synthesized and characterized. Comparison of their electronic absorption spectra revealed the dominant role of intramolecular charge transfer in their electronic structures and properties. PTQx has a reversible electrochemical reduction and high electron affinity and ionization potential which make it an attractive n-type conjugated polymer. Evaluation of PTQx as an electron transport material for PPV-based light-emitting devices showed that it was far superior to previous ET materials.

Acknowledgment. This work was supported by the Office of Naval Research and the National Science Foundation (CHE-9120001, CTS-9311741).

References and Notes

- (1) For a recent review, see: Friend, R. H.; Gymer, R. W.; Holmes, A. B.; Burroughes, J. H.; Marks, R. N.; Taliani, C.; Bradley, D. D. C.; dos Santos, D. A.; Brédas, J. L.; Lögdlund, M.; Salaneck, W. R. Nature 1999, 397, 121-128.
- (2) Stenger-Smith, J. D.; Zarras, P.; Merwin, L. H.; Shaheen, S. E.; Kippelen, B.; Peyghambarian, N. Macromolecules 1998, 31, 7566.
- (3) (a) Jenekhe, S. A.; Zhang, X.; Chen, X. L.; Choong, V. E.; Gao, Y.; Hsieh, B. R. Chem. Mater. 1997, 9, 409. (b) Zhang, X.; Shetty, A. S.; Jenekhe, S. A. Acta Polym. 1998, 49, 52.
- (4) (a) Jandke, M.; Strohriegl, P.; Berleb, S.; Werner, E.; Brütting, W. Macromolecules 1998,
 31, 6434. (b) Fukuda, T.; Kanbara, T.; Yamamoto, T.; Ishikawa, K.; Takezeo, H.; Fukuda,
 A. Appl. Phys. Lett. 1996, 68, 2346. (c) O'Brien, D.; Weaver, M. S.; Lidzey, D. G.;
 Bradley, D. D. C. Appl. Phys Lett. 1996, 69, 881.
- (5) Wang, Y. Z.; Gebler, D. D.; Fu, D. K.; Swager, T. M.; MacDiarmid, A. G.; Epstein, A. J. Synth. Met. 1997, 85, 1179.
- (6) Zhang, X.; Jenekhe, S. A. Mater. Res. Soc. Symp. Proc. 1998, 488, 539.
- (7) (a) Agrawal, A. K.; Jenekhe, S. A. Chem. Mater. 1996, 8, 579. (b) Agrawal, A. K.; Jenekhe, S. A. Macromolecules 1993, 26, 895.
- (8) (a) Hagnauer, G. L.; Mulligan, G. Macromolecules 1973, 6, 477. (b) Fang. T. Macromolecules 1991, 24, 444.
- (9) Sanechika, K.; Yamamoto, T.; Yamamoto, A. Bull. Chem. Soc. Jpn. 1984, 57, 752.
- (10) Yamamoto, T.; Zhou, Z.; Kanbara, T.; Shimura, M.; Kizu, K.; Maruyama, T.; Nakamura, Y.; Fukuda, T.; Lee, B. L.; Ooba, N.; Tomaru, S.; Kurihara, T.; Kaino, T.; Kubota, K.; Sasaki, S. J. Am. Chem. Soc. 1996, 118, 10389.
- (11) (a) Jenekhe, S. A.; Osaheni, J. A. Science 1994, 265, 765. (b) Osaheni, J. A.; Jenekhe, S. A. Macromolecules 1994, 27, 739.

Figure Captions

- Figure 1. Optical absorption and PL spectra of PTQx thin film and electroluminescence spectrum of an ITO/PPV (35 nm)/PTQx (40 nm)/Al LED at a bias of 4 V.
- Figure 2. Current-voltage and luminance-voltage curves of an ITO/PPV (35 nm)/PTQx (40 nm)/Al LED. Inset shows the schematic device structure.

$$- \left(\begin{array}{c} \\ \\ \\ \\ \end{array} \right) Ar \xrightarrow[]{N-} \\ \\ \\ \\ \end{array} \right)_n$$

1a, PPQx:
$$Ar = -$$

1a, PPQx:
$$Ar =$$
1b, PTQx: $Ar =$

Scheme 1

Fig.1.


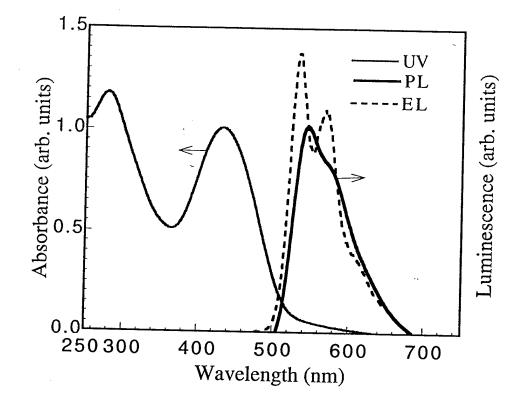


Fig.2.

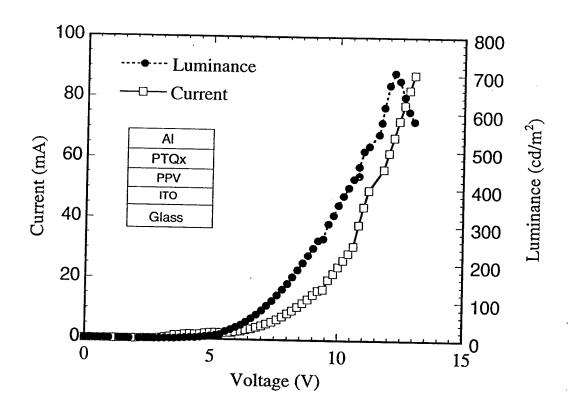

Thiophene-Linked Polyphenylquinoxaline: A New Electron Transport Conjugated Polymer for Electroluminescent Devices

Yuanting Cui, Xuejun Zhang, and Samson A. Jenekhe* Departments of Chemical Engineering and Chemistry University of Rochester, Rochester, New York 14627-0166

SUPPORTING INFORMATION

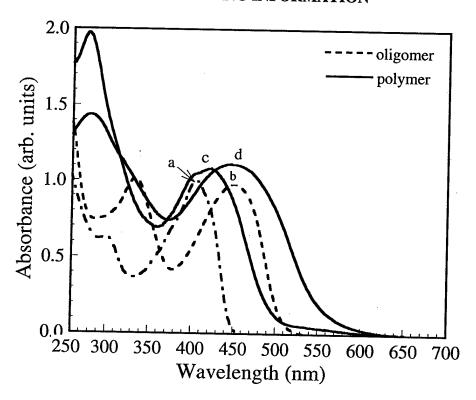


Fig. S1 UV-vis absorption spectra of TQx oligomer in chloroform (a) and formic acid (b) and PTQx polymer in chloroform (c) and formic acid (d). (All solutions are 10⁻⁶M)

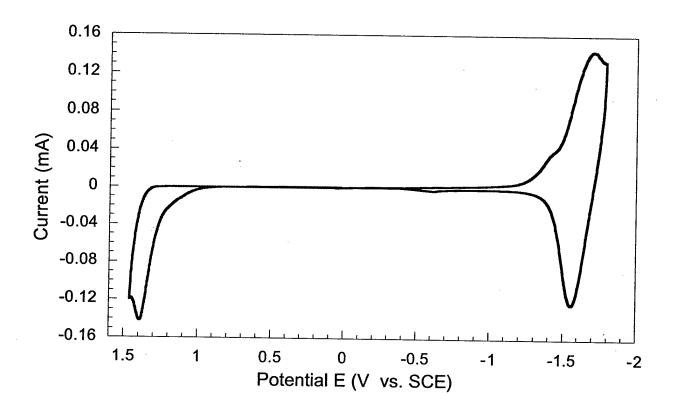


Fig S2. Cyclic voltammogram of PTQx thin film in acetonitrile with tetra-n-butylammonium tetrafluoroborate (0.1M) as the electrolyte. Scan rate: 20 mV/s.

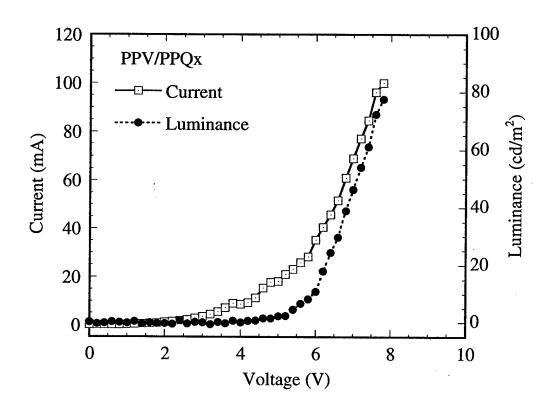


Fig. S3. The current-voltage and luminance-voltage characteristics of ITO/PPV(35nm)/PPQx(40nm)/Al device.

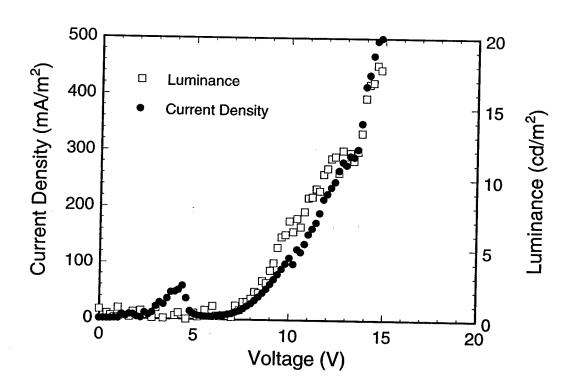


Fig. S4. The Current-voltage and luminance-voltage characteristics of ITO/ PPV (35nm) /Al device.

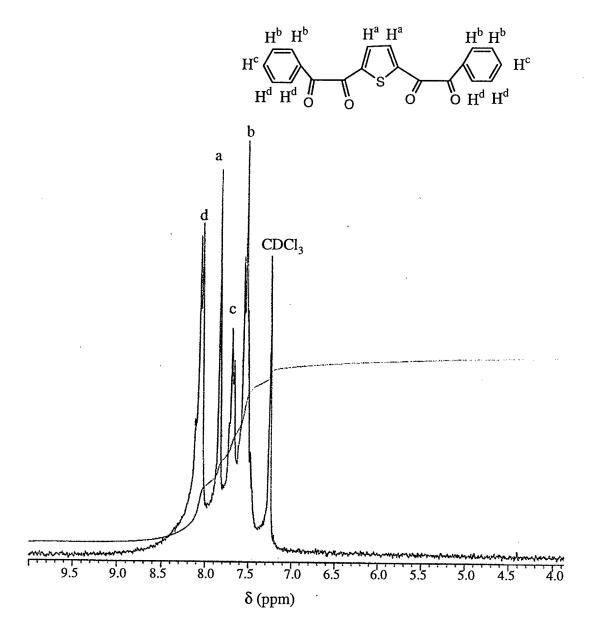


Fig. S5. ¹H NMR spectrum of PTQx monomer in d-chloroform.

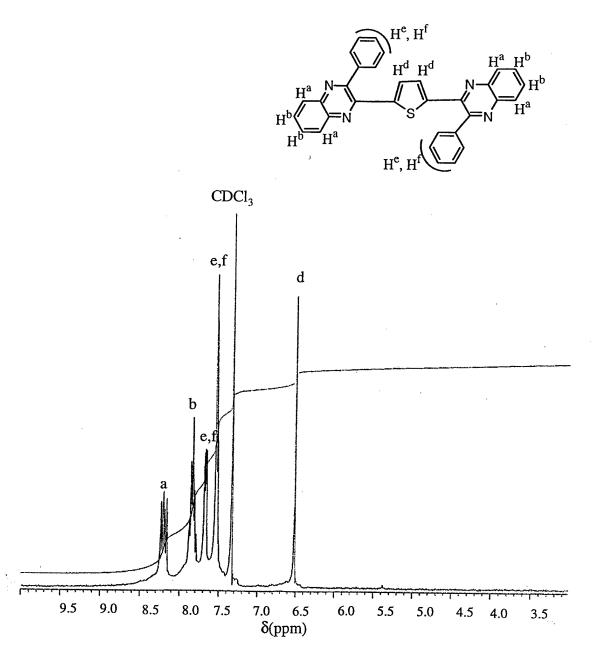


Fig. S6. ¹H NMR spectrum of model compound TQx in d-chloroform.

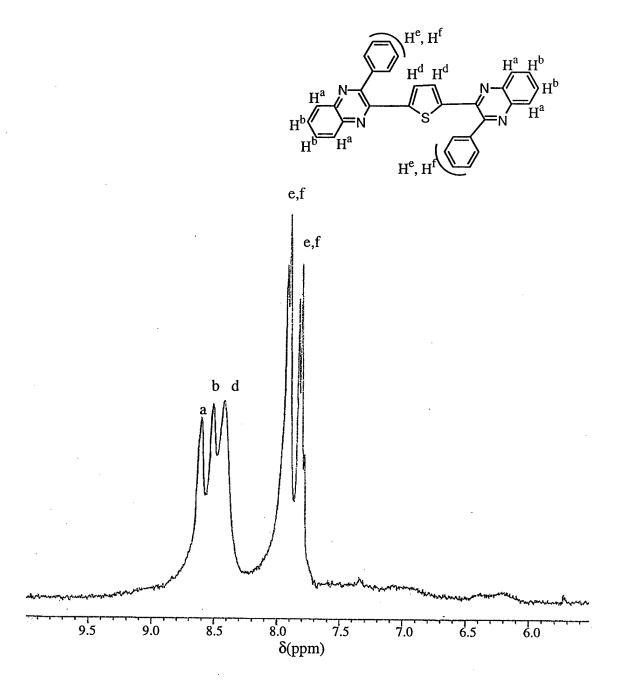


Fig. S7. ¹H NMR spectrum of model compound TQx in d-nitromethane/GaCl₃.

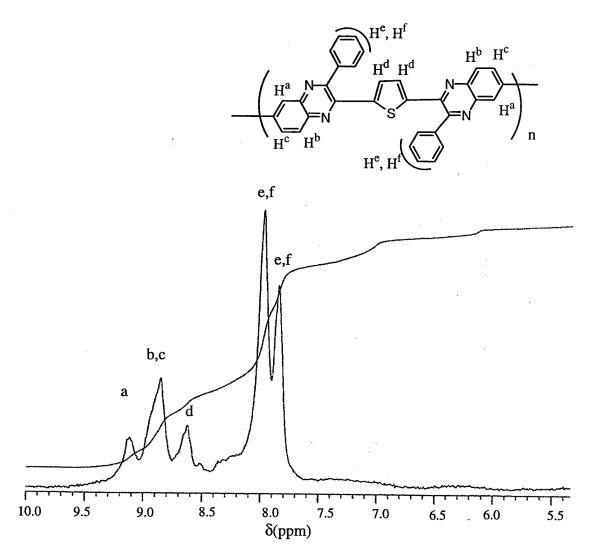


Fig. S8 ¹H NMR spectrum of PTQx in d-nitromethane containing GaCl₃.

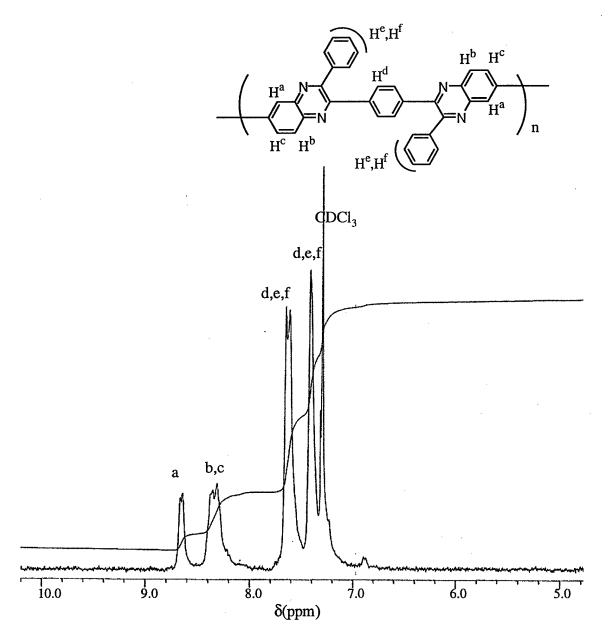


Fig. S9. ¹H NMR spectrum of PPQx in d-chloroform.